



FIG. 1A

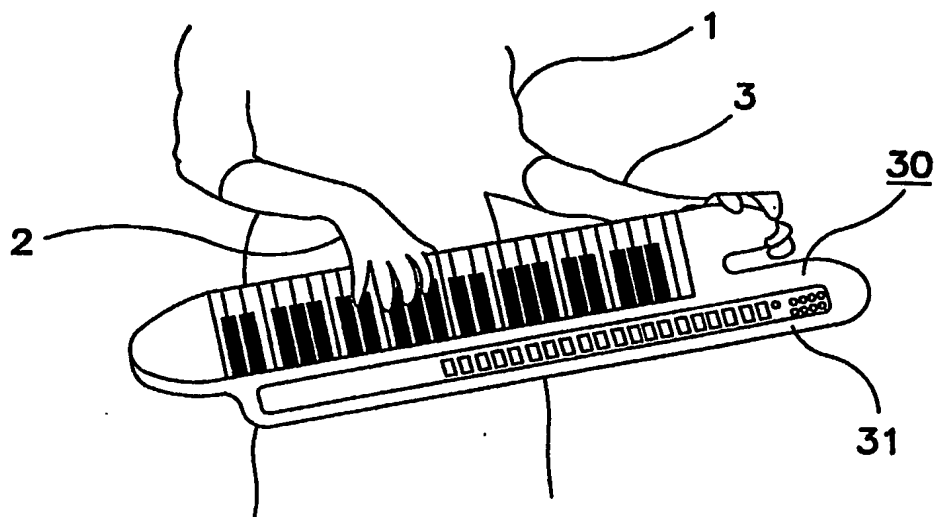


FIG. 1

2/13

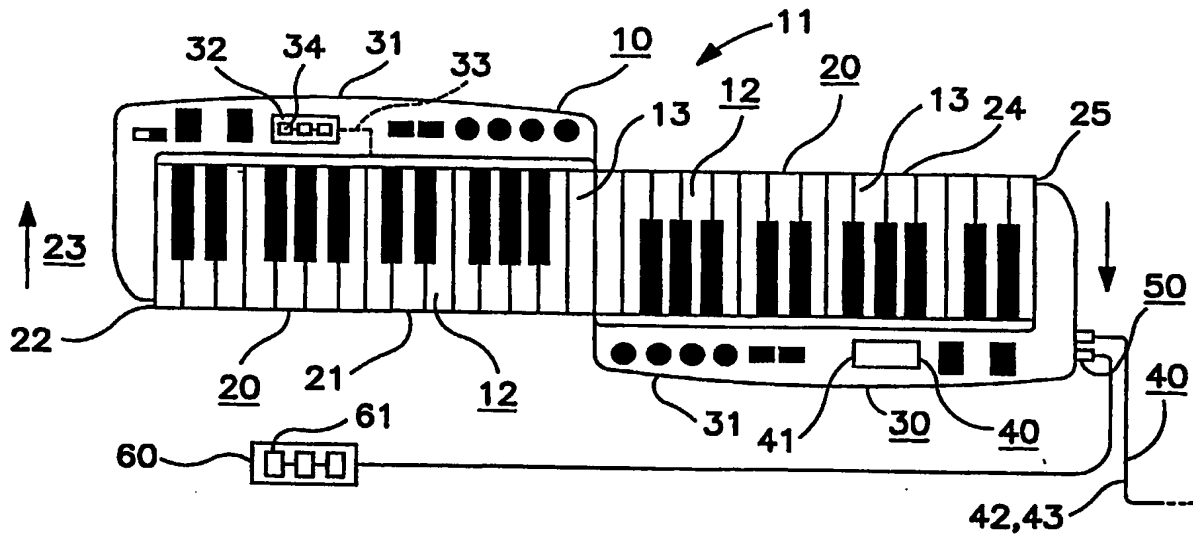


FIG. 2A

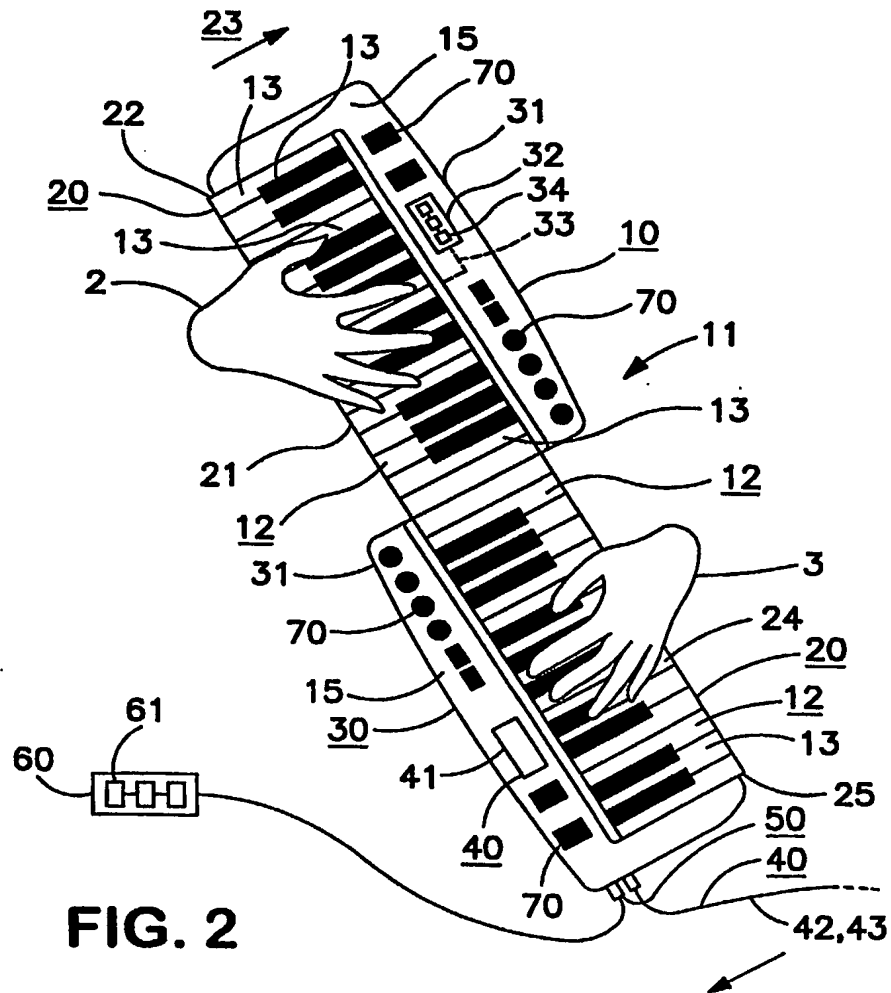


FIG. 2

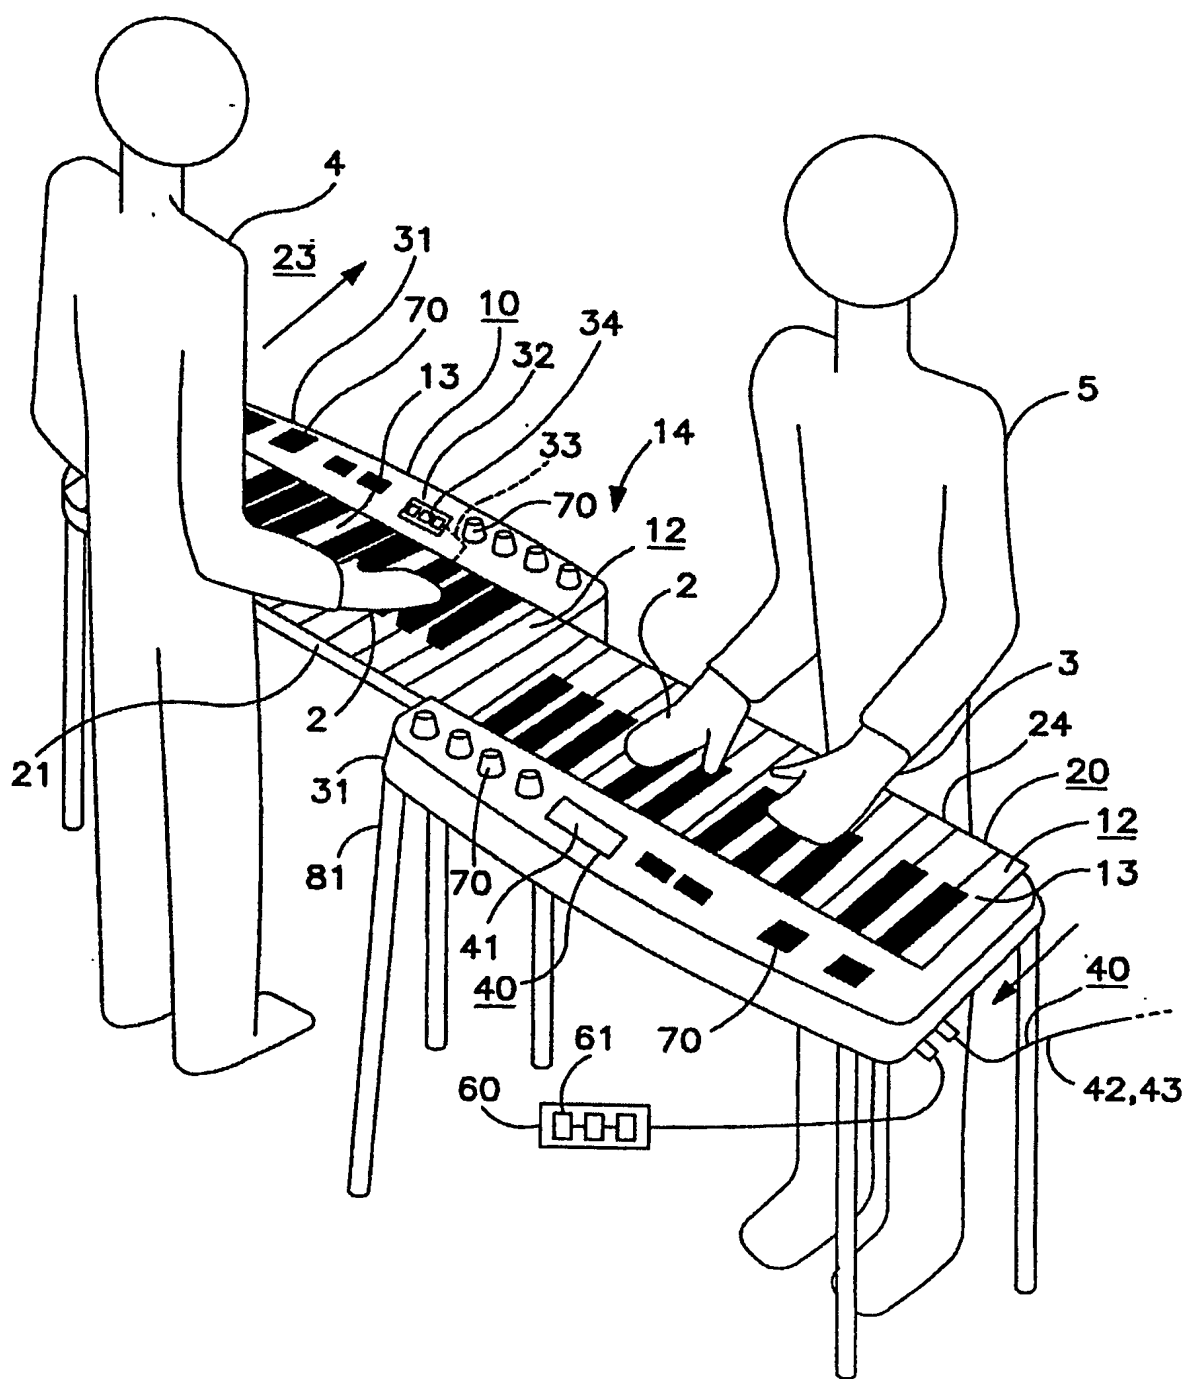


FIG. 3

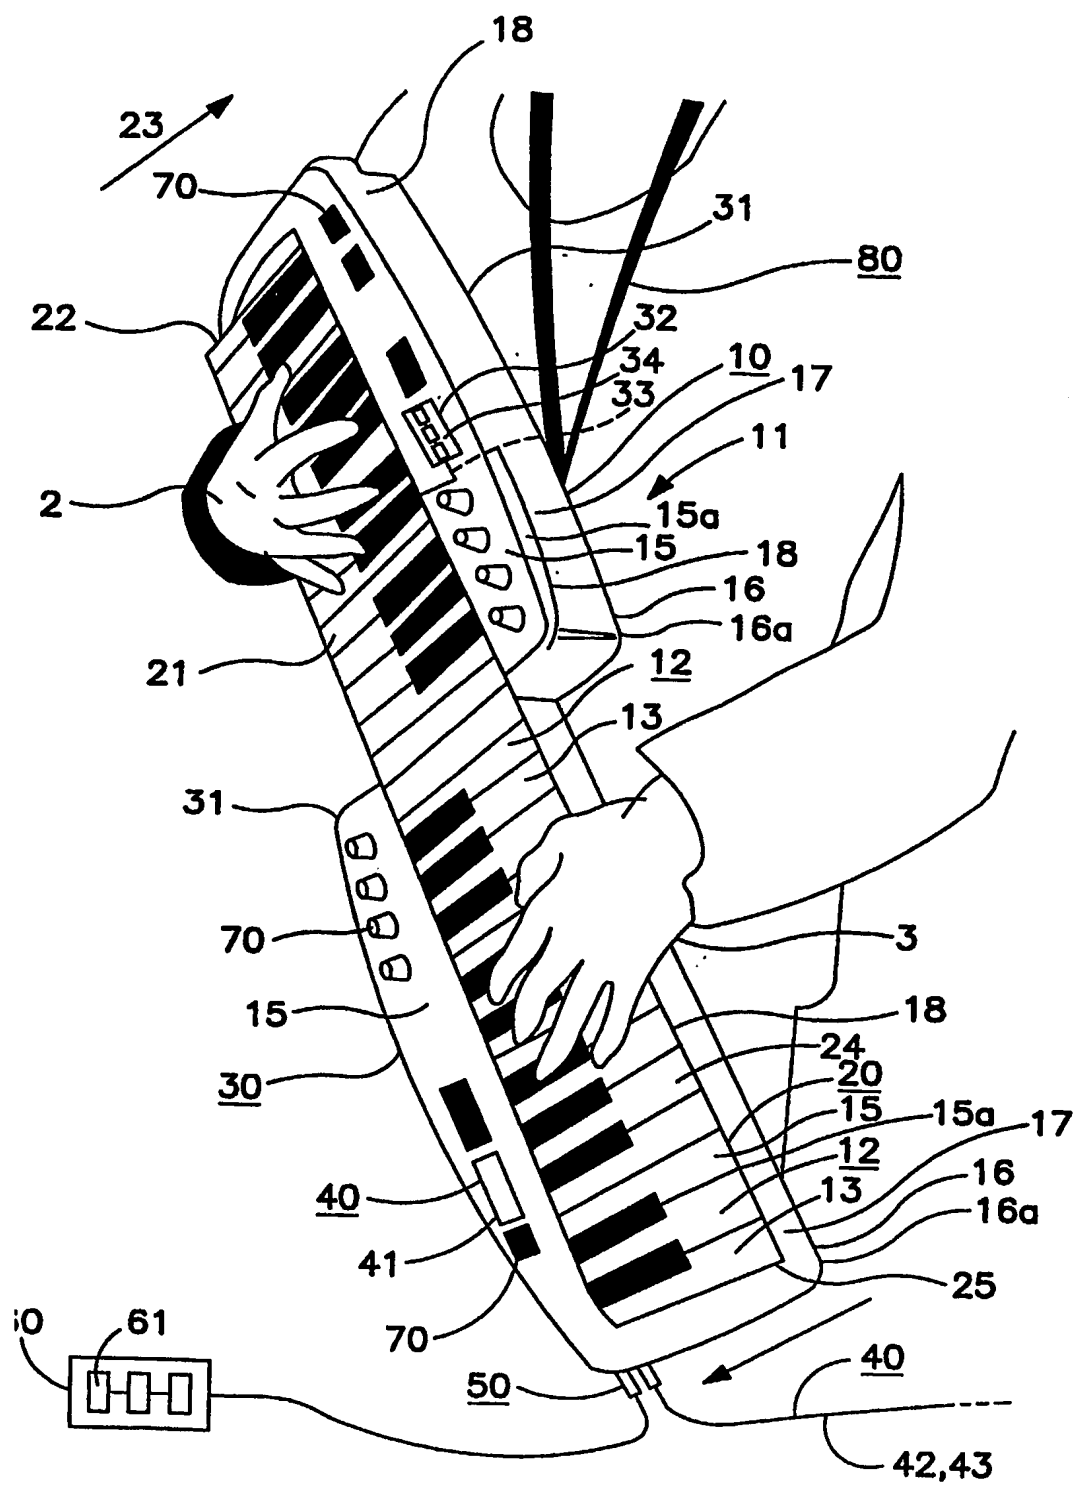


FIG. 4

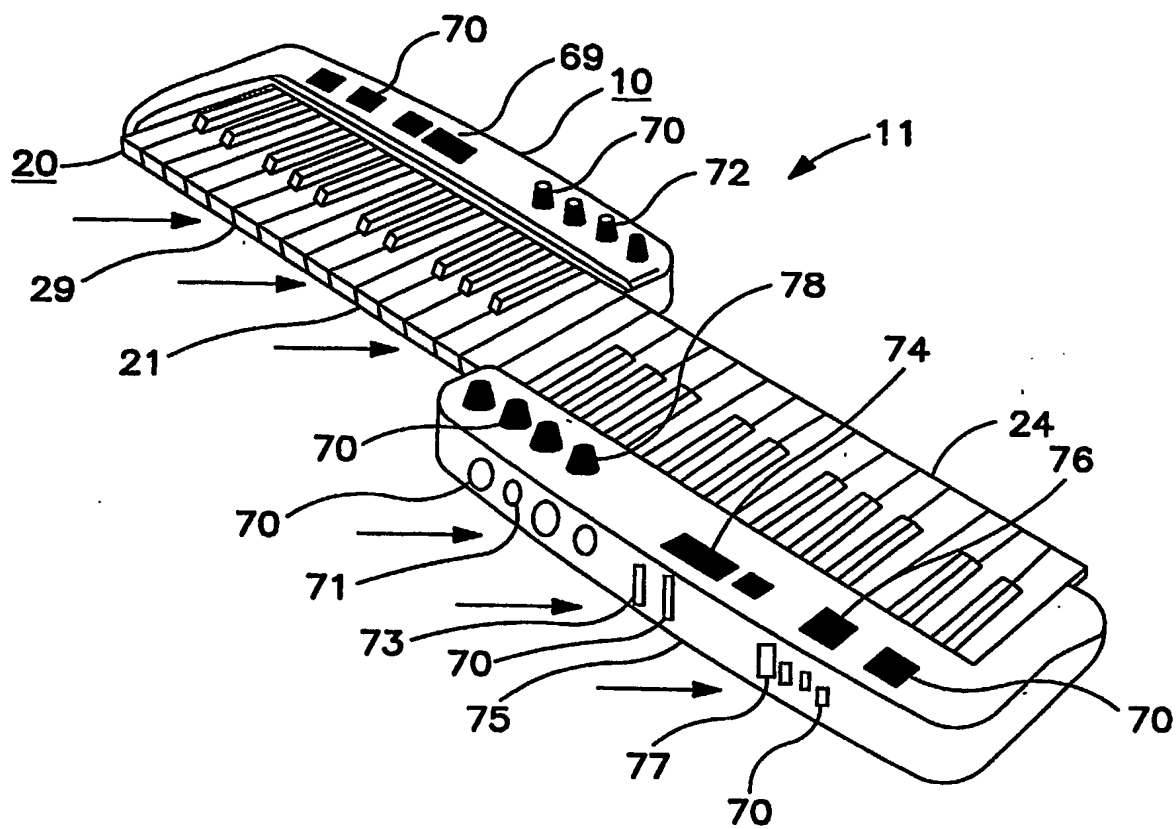


FIG. 5

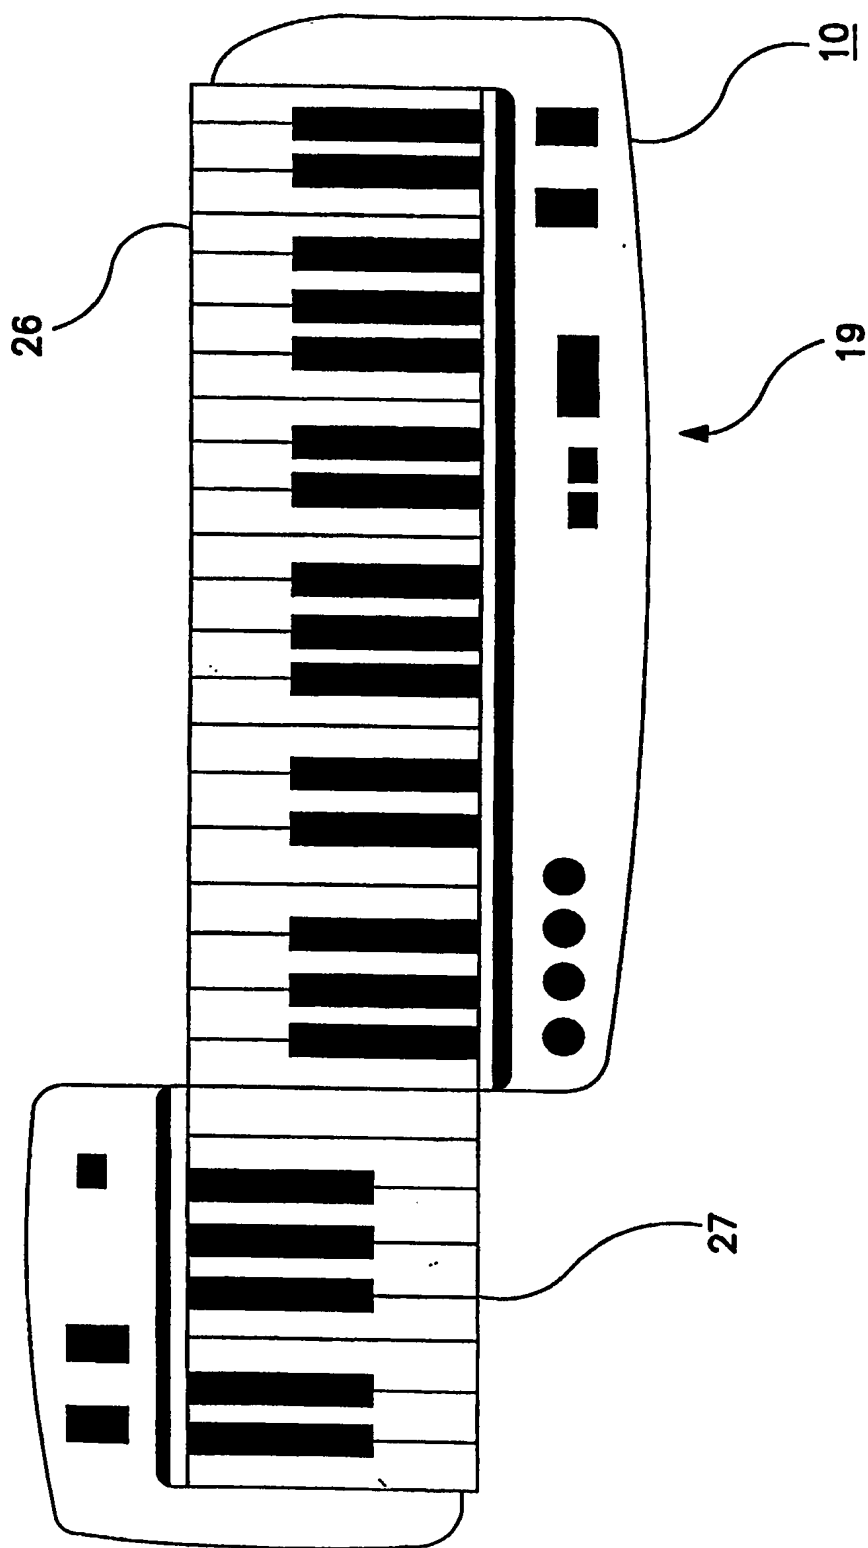


FIG. 6

7/13

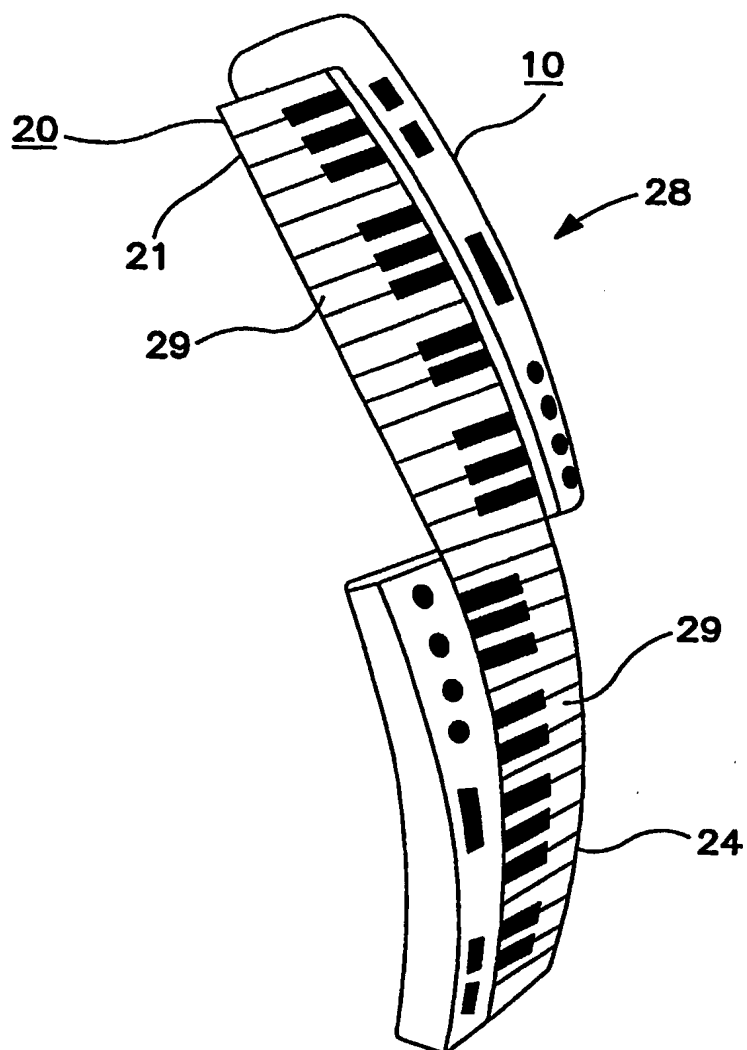


FIG. 7

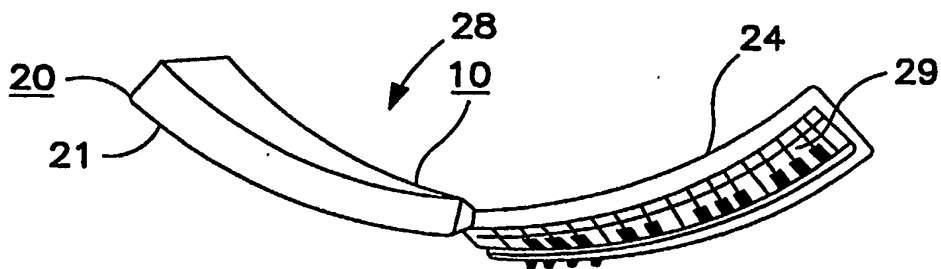


FIG. 7A

8/13


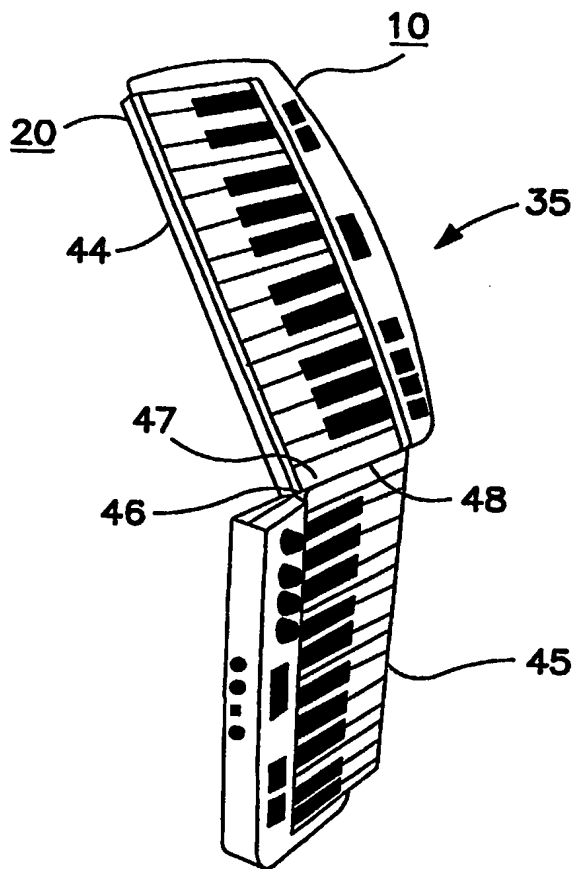


FIG. 8

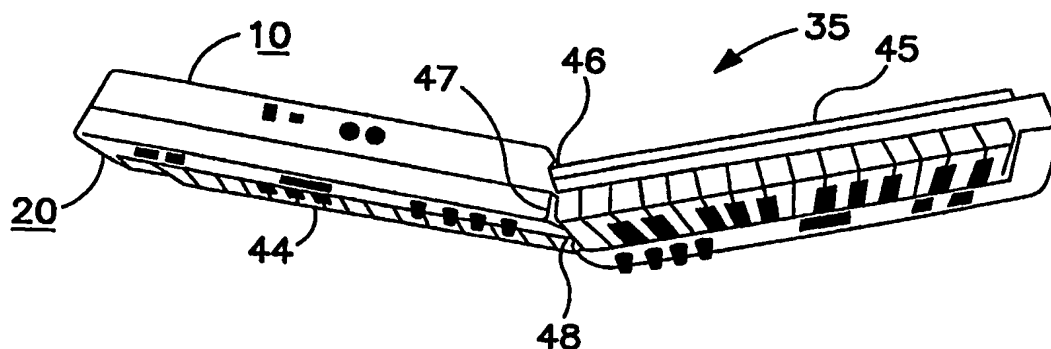

9/13

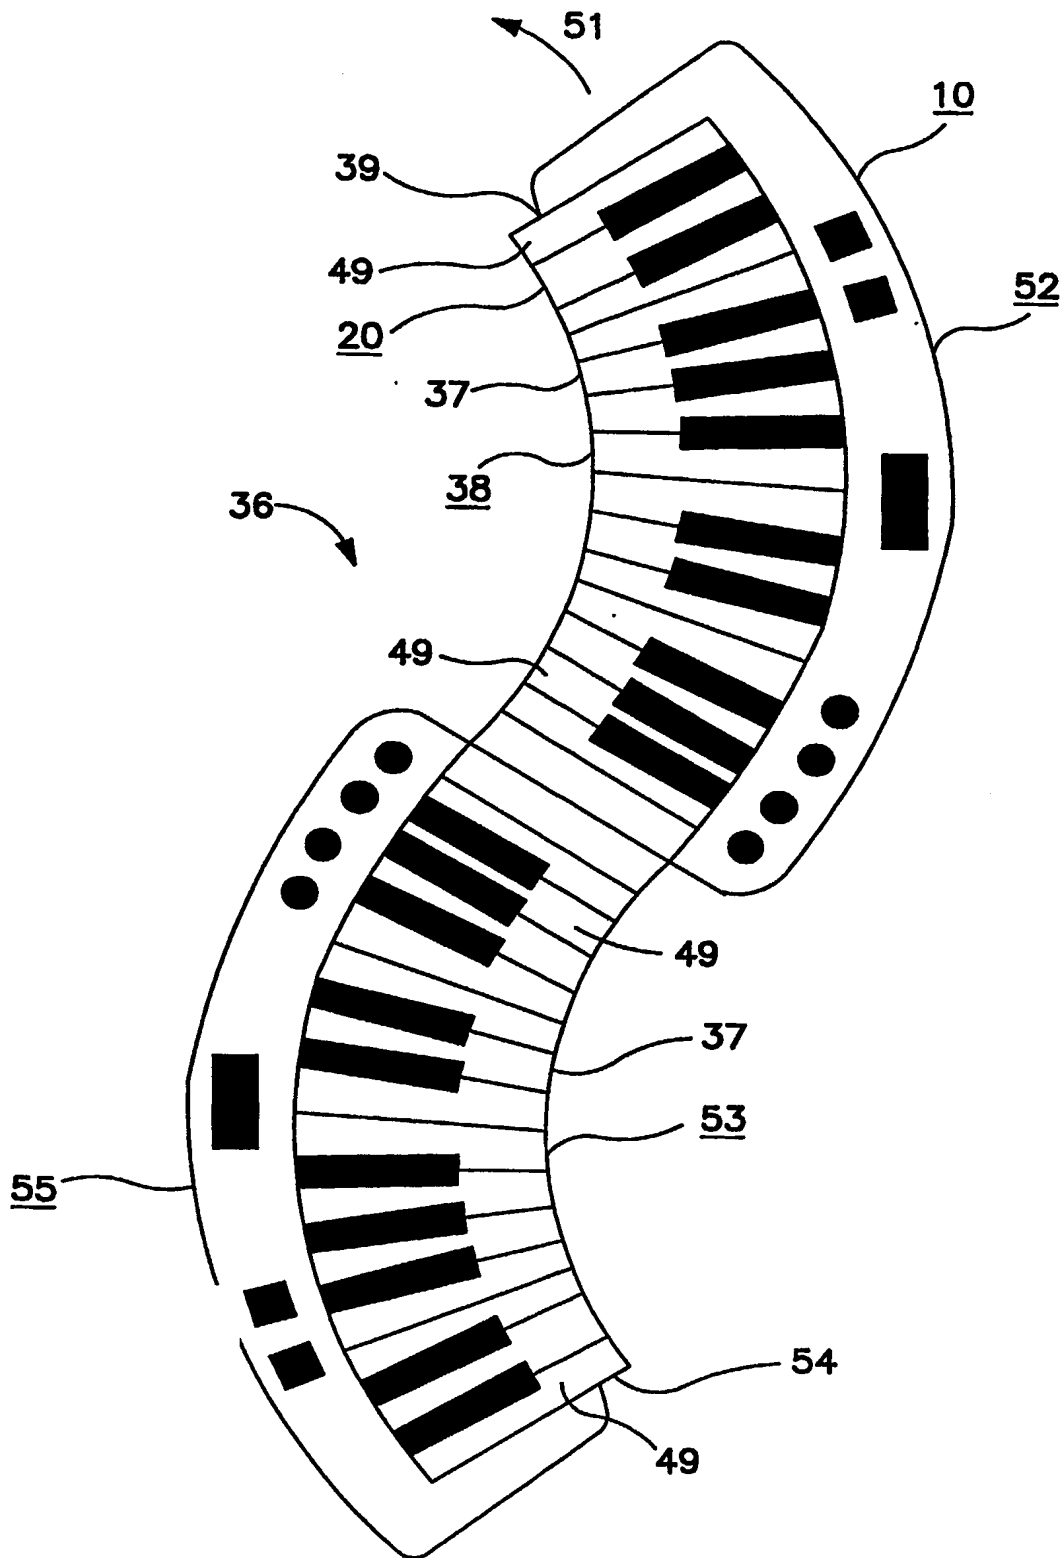


FIG. 9

SUBSTITUTE SHEET (RULE 26)

10/13

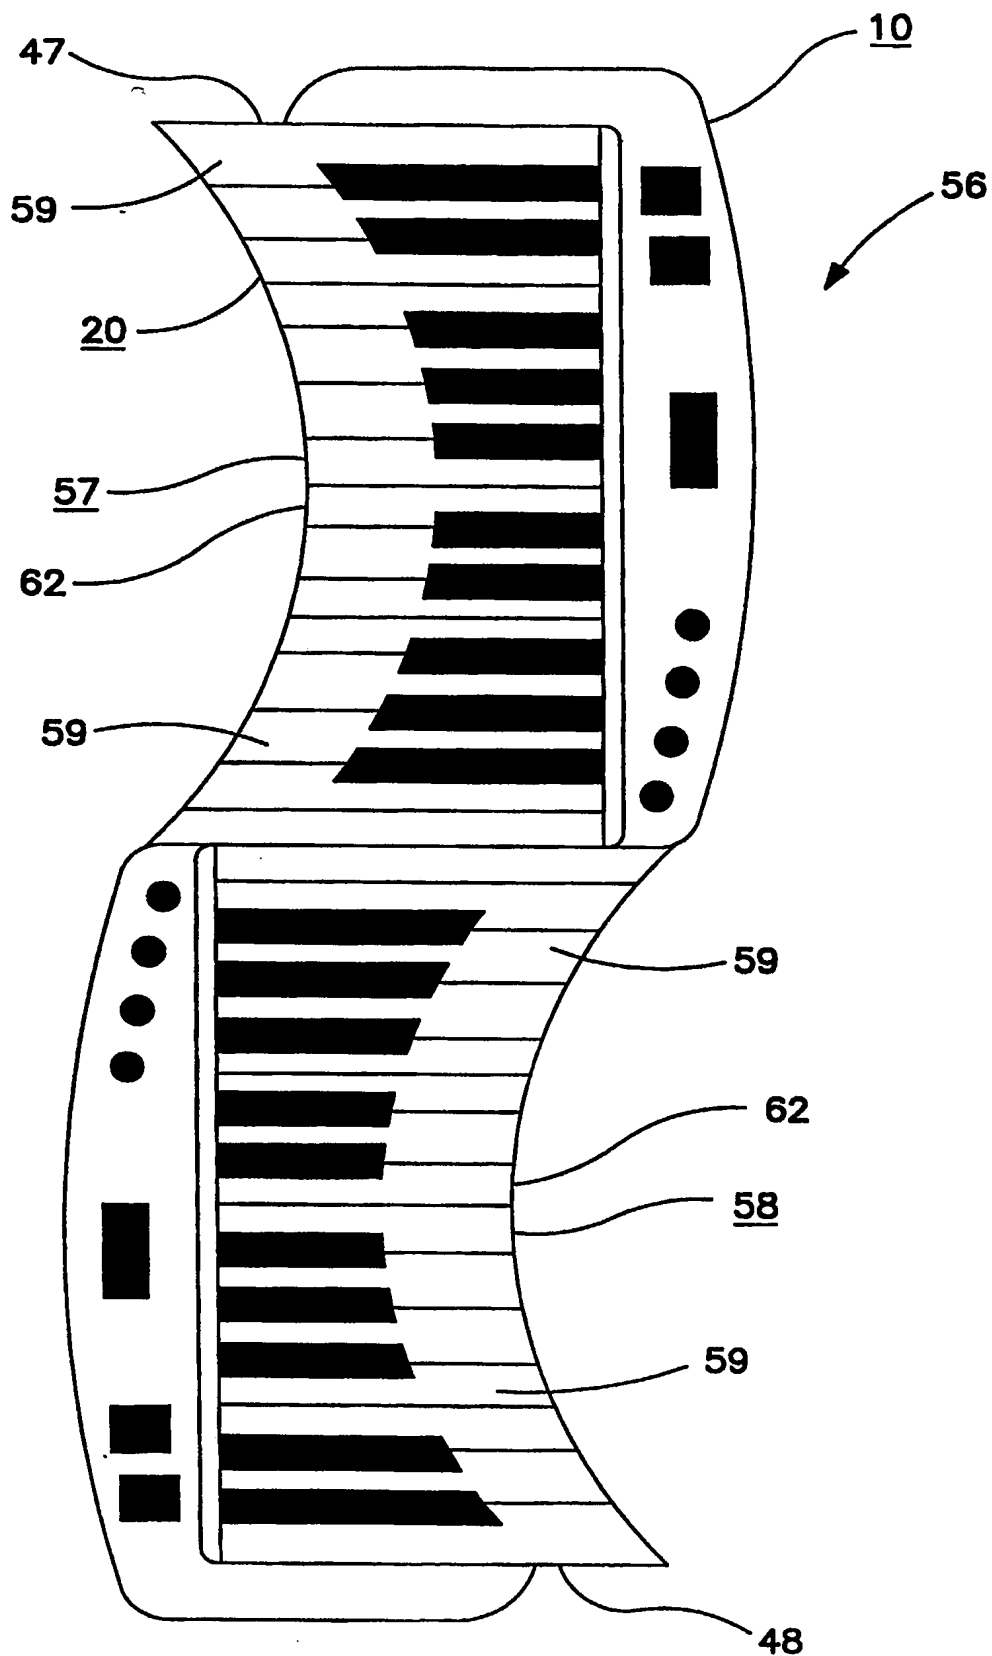


FIG. 10

SUBSTITUTE SHEET (RULE 26)

11/13

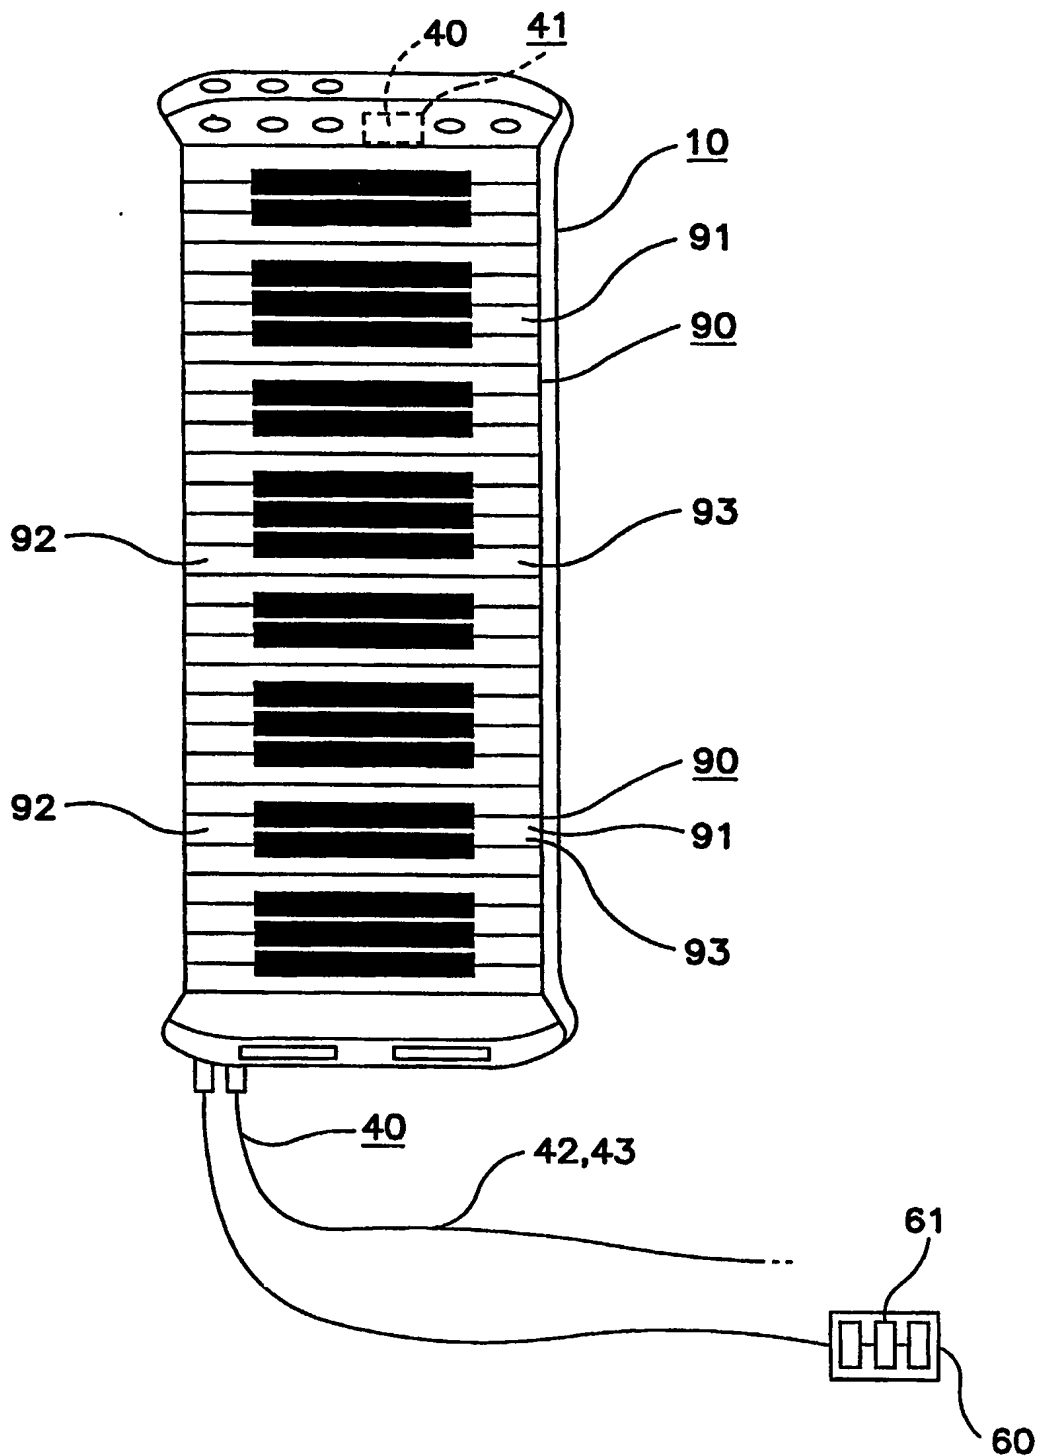


FIG. 11

12/13


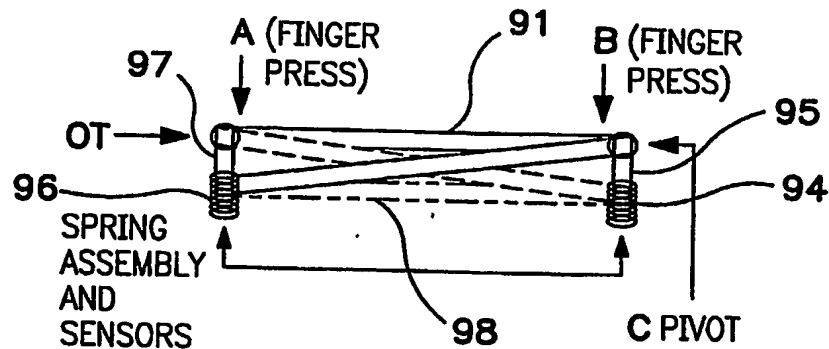


FIG. 12

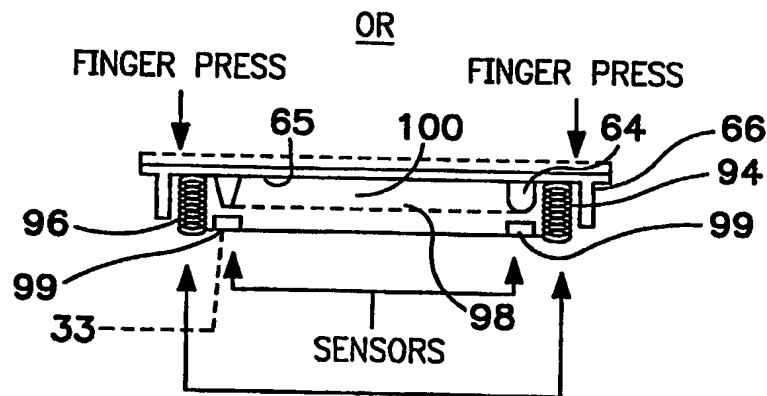

SPRINGS ARE MADE
TO ALLOW PRESS FROM
ABOVE, BUT ACT AS
ANCHORS TO PIVOT
WHEN PRESSED FROM
OPPOSITE SIDE

- BOTH SIDES CAN BE
PRESSED AT SAME TIME
- EACH SIDE HAS ITS OWN
INDEPENDANT SENSOR SO IS
SEPARATE FROM OTHER SIDE
IN TERMS OF MIDI INFORMATION

FIG. 13

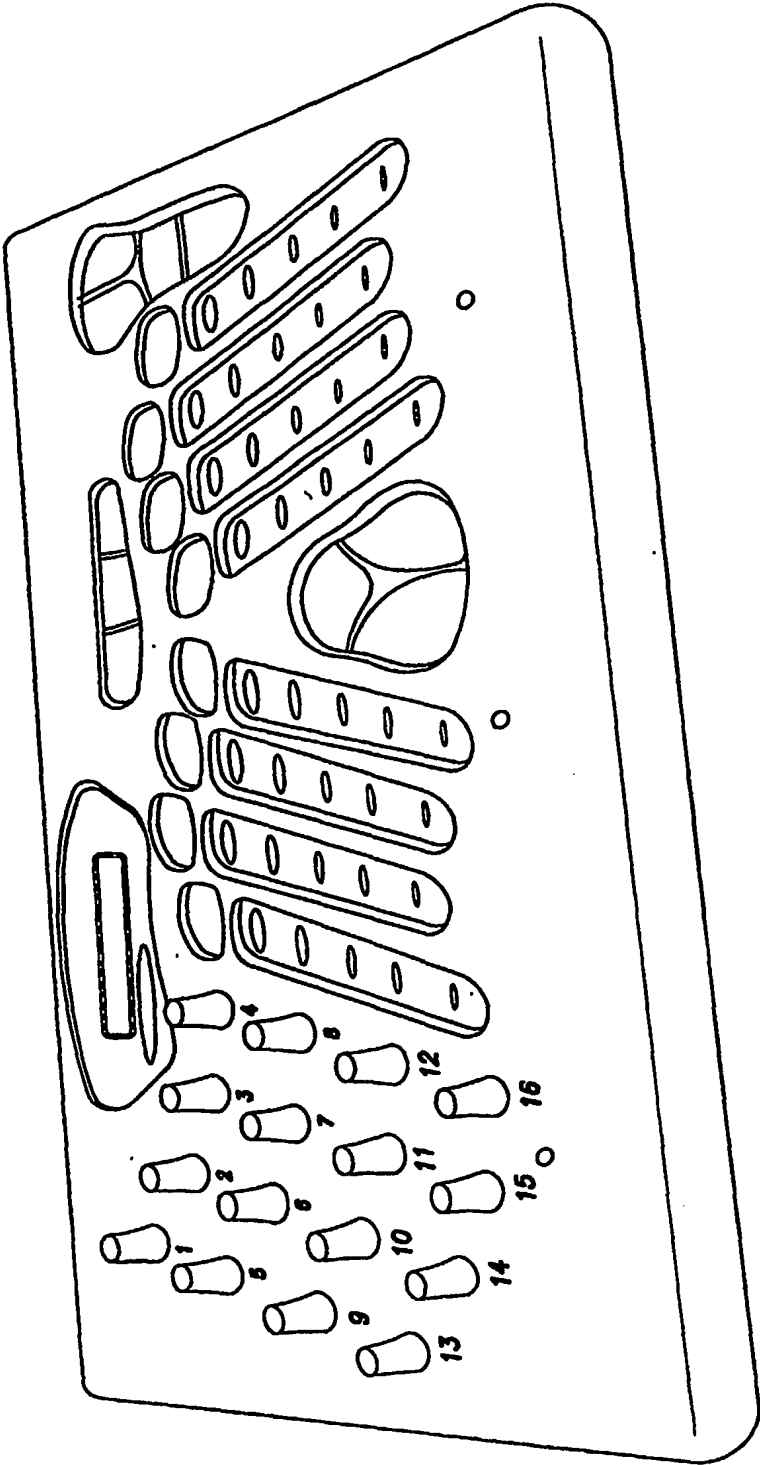


FIG. 14